

850...960 MHz / 1710...2700 MHz / 4400...6000 MHz PCB Antenna (ISM, IoT, BT, Wi-Fi, 5G, LTE)



#### General information

The AN110504-02C is a multi-band embedded PCB antenna engineered for internal installation in compact wireless devices requiring extended frequency coverage from sub-GHz to 6 GHz. It operates across 850...960 MHz, 1710...2700 MHz, and 4400...6000 MHz bands, providing support for GSM, LTE, and 5G NR networks below 6 GHz, as well as dual-band and extended 5 GHz Wi-Fi standards.

Its multi-band capability makes it suitable for devices requiring reliable cellular connectivity combined with high-speed WLAN operation. With omnidirectional radiation characteristics and linear polarization, the antenna ensures stable coverage in compact and space-constrained enclosures.

Typical applications include industrial IoT gateways, smart metering systems, telematics units, payment terminals, security and alarm systems, portable routers, smart city infrastructure, healthcare monitoring devices, and advanced telematics units. The antenna is implemented on an FR-4 substrate and features a soldered micro-coaxial RF cable terminated with an I-PEX MHF1 / Hirose U.FL (UMCC) compatible connector for convenient connection to RF modules.

#### Electrical data

Antenna type	Embedded / internal PCB antenna		
5G bands	1 - 3, 7, 8, 25, 30, 34, 38 - 41, 46, 47, 53, 65, 70, 79 - 81, 84, 86, 90		
4G bands	1 - 4, 7 - 10, 23, 25, 30, 33 - 41, 46, 47, 53, 65, 69, 70		
Other frequency bands	SRD860, ISM915, ISM2400, Wi-Fi 5 GHz, ISM5800		
Frequency range [MHz]	850...960	1710...2700	4400...6000
Return loss [dB]	-5	-6	-7
Peak gain [dBi]	-1.8...1.2	-2.9...2.2	2.5...4
Radiation efficiency [%]	44...73	38...82	60...85
Nominal input impedance [Ohm]	50		
Polarization	linear		
Radiation pattern	omnidirectional		
Maximum input power [W]	5		

#### Mechanical data

Antenna PCB dimensions [mm]	97 x 19 x 0.8
Connector type <sup>1)</sup>	IPEX MHF1 / Hirose U.FL (UMCC) compatible <sup>1)</sup>
Cable type and thickness <sup>2)</sup> [mm]	micro coax 1.13 <sup>2)</sup>
Cable length <sup>3)</sup> [mm]	175 <sup>3)</sup>
PCB material	FR4

#### Additional information

<sup>1)</sup> Other connector types can be offered on request.

<sup>2)</sup> Following cable thicknesses can be used with MHF1 connector: 0.81 mm, 1.13 mm, 1.32 mm, 1.37 mm.

<sup>3)</sup> Other cable lengths can be provided.

Antenna performance was measured using the recommended cable length in free space.


Further customization, electromagnetic simulations and measurements can be offered on request.

The antenna can be additionally equipped with adhesive tape and mounting holes.


All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2026 Sevskiy GmbH. All rights reserved. No warranties.

850...960 MHz / 1710...2700 MHz / 4400...6000 MHz PCB Antenna (ISM, IoT, BT, Wi-Fi, 5G, LTE)

Measured input impedance matching

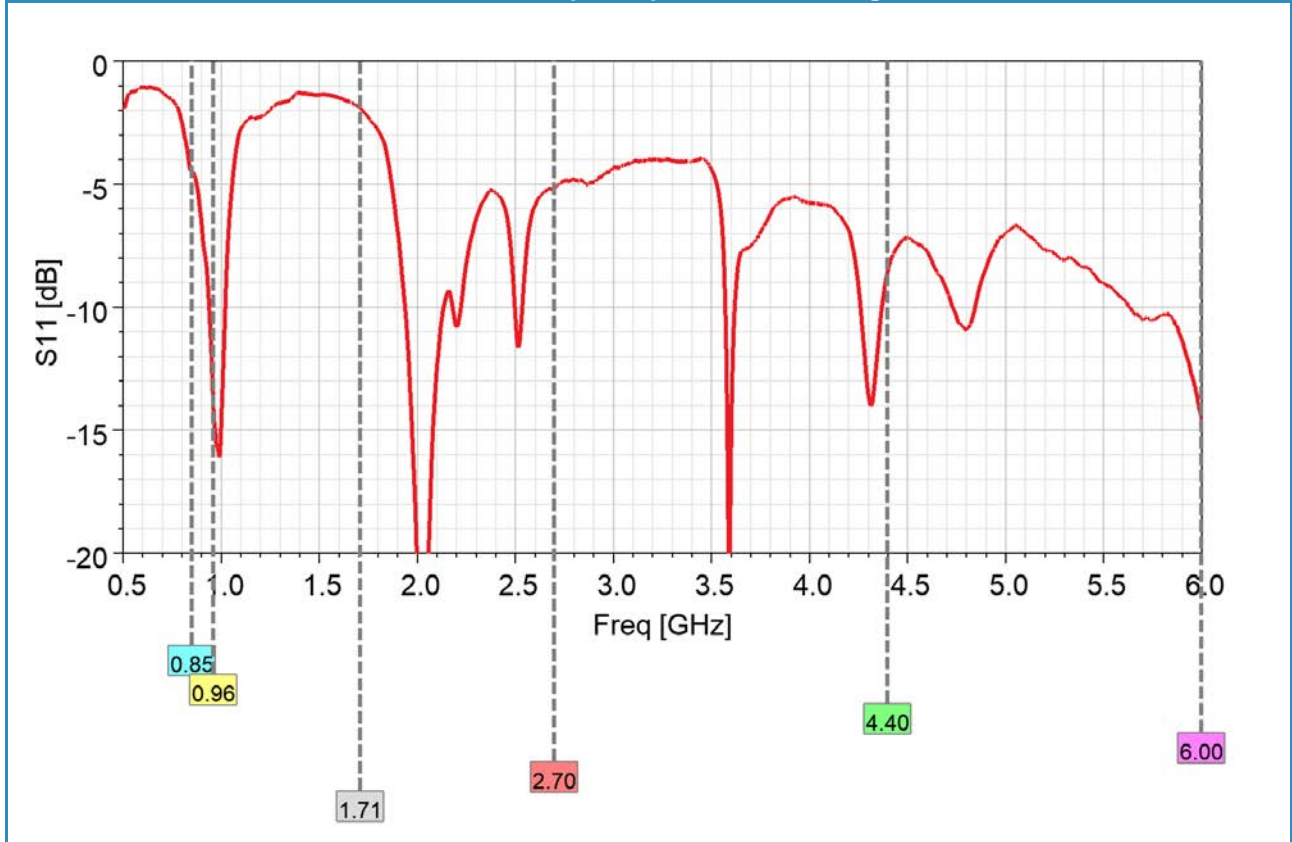


VSWR

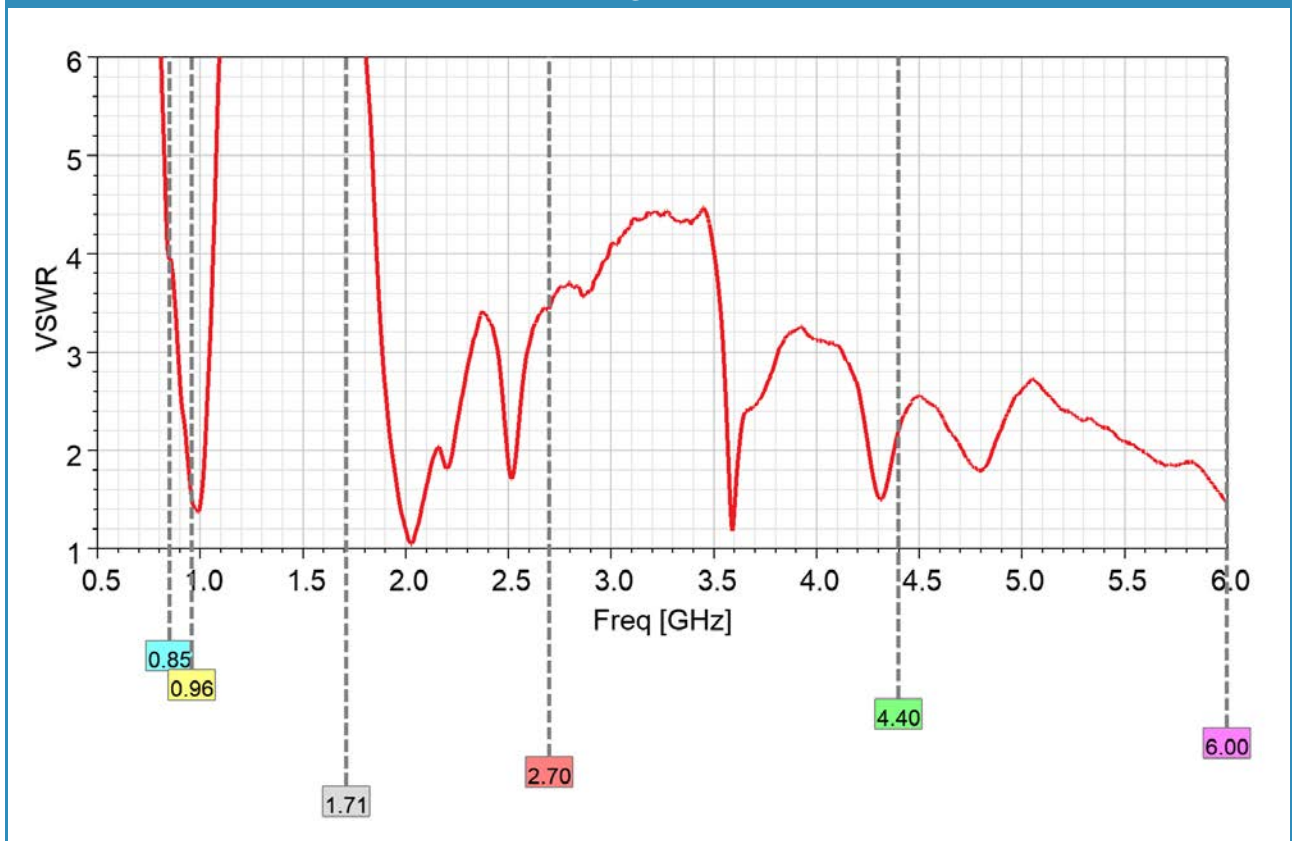


All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2026 Sevskiy GmbH. All rights reserved. No warranties.

850...960 MHz / 1710...2700 MHz / 4400...6000 MHz PCB Antenna (ISM, IoT, BT, Wi-Fi, 5G, LTE)

**Peak realized gain**

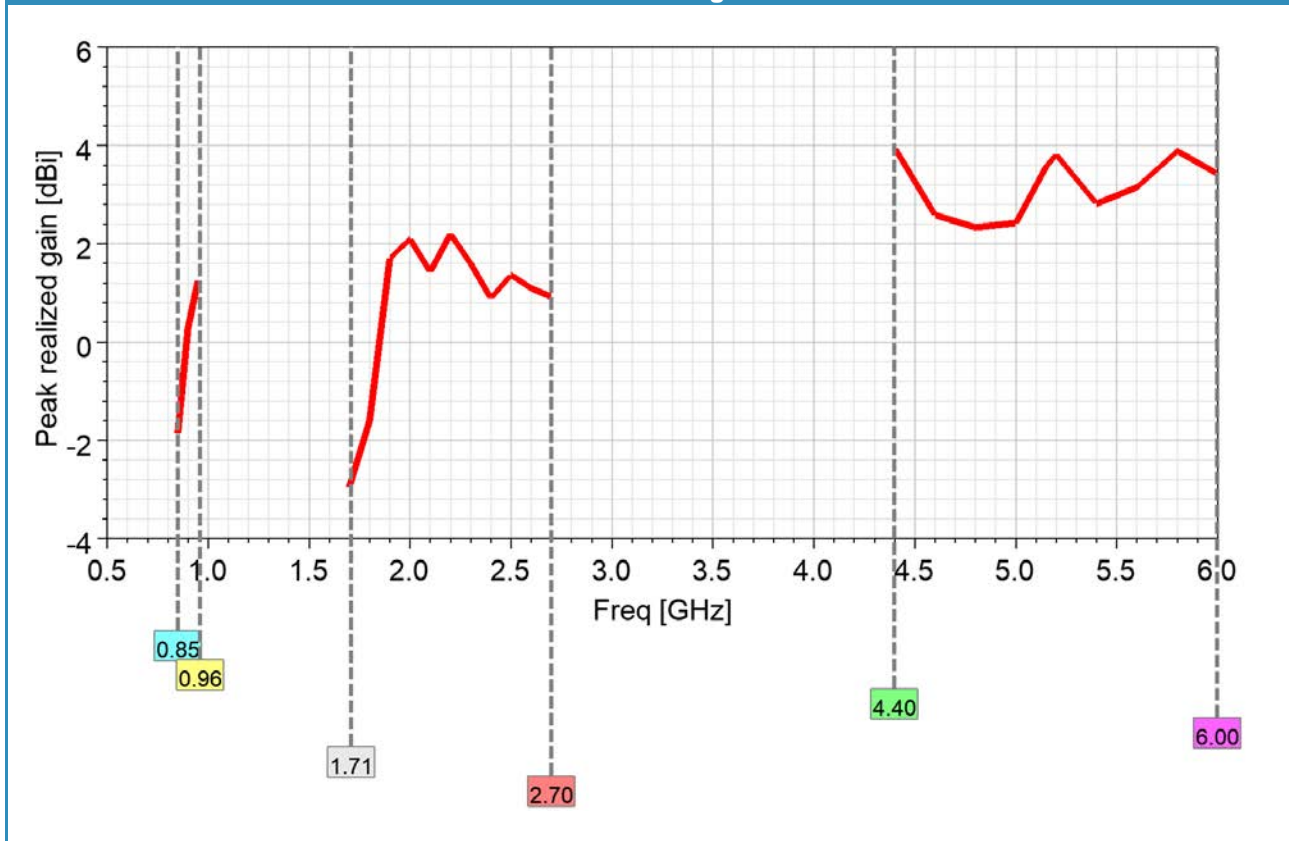


**Radiation efficiency**

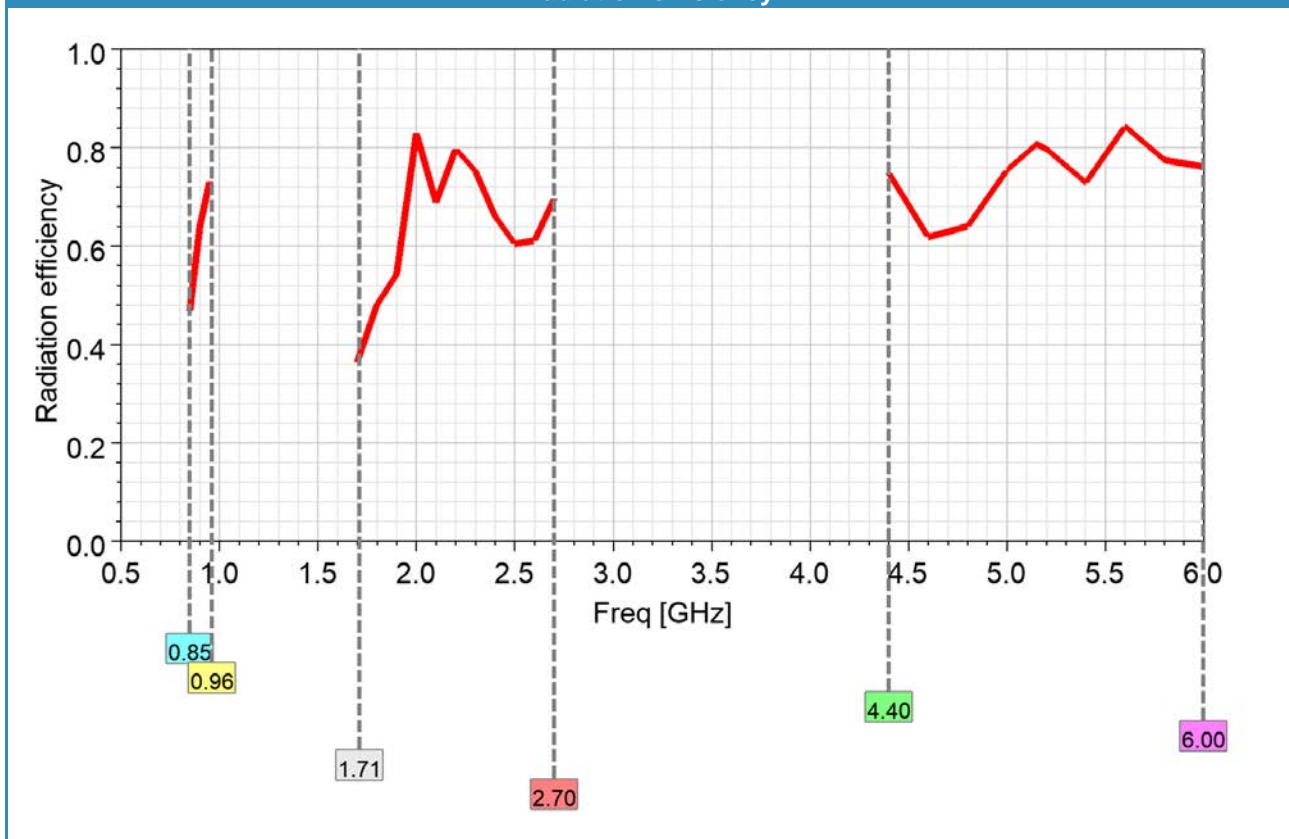


All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2026 Sevskiy GmbH. All rights reserved. No warranties.

850...960 MHz / 1710...2700 MHz / 4400...6000 MHz PCB Antenna (ISM, IoT, BT, Wi-Fi, 5G, LTE)


**Product dimensions**

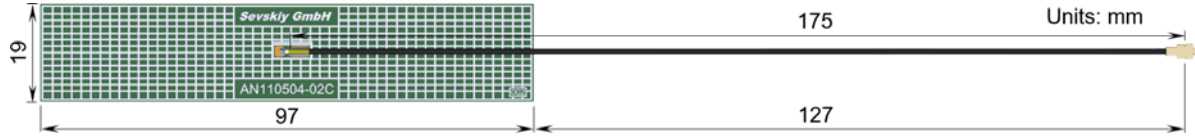


**Radiation pattern**

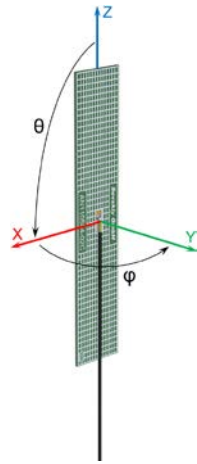


Total realized gain [dBi]  
 Phi=0°, plane XZ, green curve  
 Phi=90°, plane YZ, red curve  
 Theta=90°, plane XY, blue curve

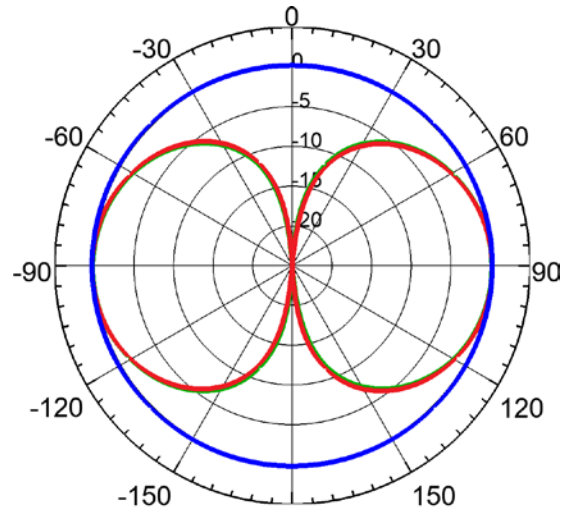

900 MHz

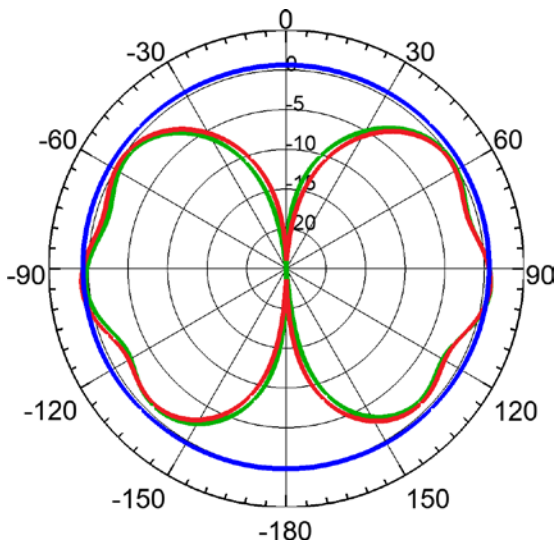

2400 MHz

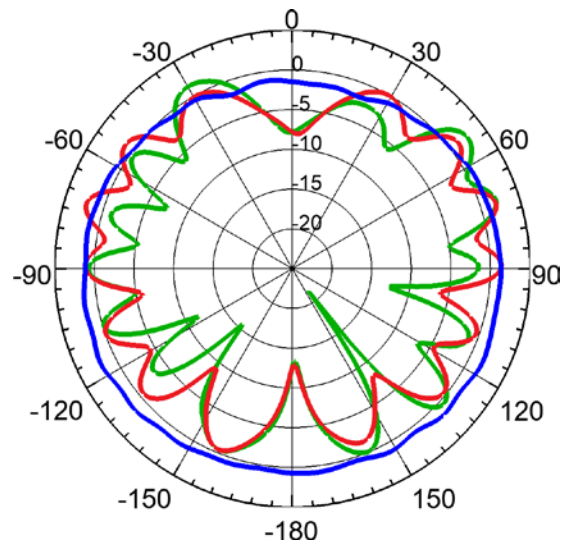

5400 MHz

All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2026 Sevskiy GmbH. All rights reserved. No warranties.