

1164...1300 MHz PCB Antenna (GPS L2/L5, GLONASS L2/L3, Galileo E5a/E5b/E6, BeiDou B2/B3)



General information

The AN150206-01H is a compact embedded PCB antenna specifically designed for lower-band GNSS reception, covering the frequency range from 1164 to 1300 MHz. This range includes modern high-precision navigation signals such as GPS L2/L5, GLONASS L2/L3, Galileo E5a/E5b/E6, and BeiDou B2/B3, making the antenna suitable for multi-constellation and multi-frequency GNSS systems.

The antenna is optimized for applications requiring improved positioning accuracy, ionospheric error correction, and robust performance in challenging environments. Typical use cases include precision navigation, surveying and mapping equipment, timing and synchronization systems, smart transportation, autonomous and assisted driving platforms, UAVs, and industrial GNSS receivers.

The antenna is implemented on an FR-4 PCB and features linear polarization with an omnidirectional radiation pattern, providing stable reception regardless of device orientation. It is equipped with an I-PEX MHF1 / Hirose U.FL (UMCC) compatible connector, allowing connection of an external RF cable for flexible integration into compact GNSS modules and plastic enclosures.

Electrical data

Antenna type	Embedded / internal PCB antenna
Frequency band	GPS L2/L5, GLONASS L2/L3, Galileo E5a/E5b/E6, BeiDou B2/B3
Frequency range [MHz]	1164...1300
Return loss [dB]	-10
Peak gain [dBi]	3...3.5
Radiation efficiency [%]	90
Nominal input impedance [Ohm]	50
Polarization	linear
Radiation pattern	omnidirectional
Maximum input power [W]	5

Mechanical data

Antenna PCB dimensions [mm]	39.4 x 14.1 x 1
Connector type ¹⁾	IPEX MHF1 / Hirose U.FL (UMCC) compatible ¹⁾
Cable type and thickness ²⁾ [mm]	micro coax 1.13 ²⁾
Cable length ³⁾ [mm]	175 ³⁾
PCB material	FR4

Additional information

¹⁾ Other connector types can be offered on request.

²⁾ Following cable thicknesses can be used with MHF1 connector: 0.81 mm, 1.13 mm, 1.32 mm, 1.37 mm.

³⁾ Recommended length. Cable is not included but can be customized and provided separately.

Antenna performance was measured using the recommended cable length in free space.


Further customization, electromagnetic simulations and measurements can be offered on request.

The antenna can be additionally equipped with adhesive tape and mounting holes.


All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2026 Sevskiy GmbH. All rights reserved. No warranties.

1164...1300 MHz PCB Antenna (GPS L2/L5, GLONASS L2/L3, Galileo E5a/E5b/E6, BeiDou B2/B3)

Measured input impedance matching

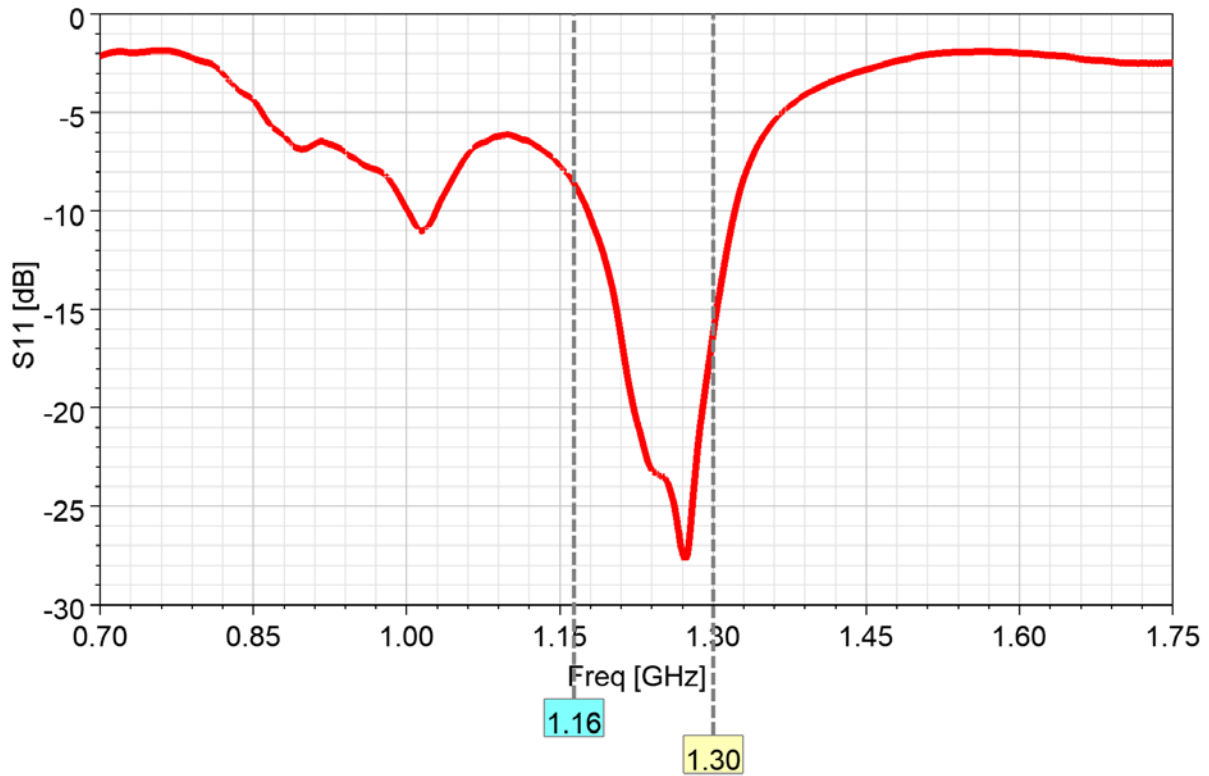


VSWR

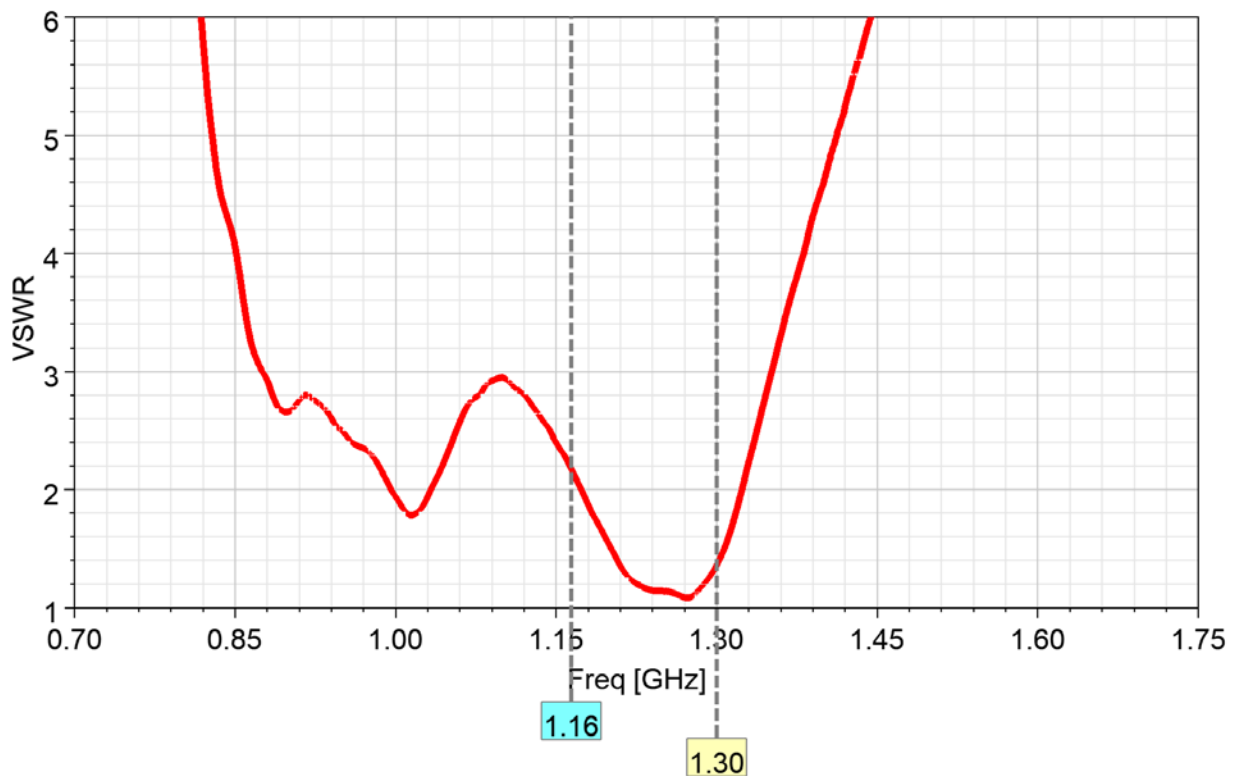


All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2026 Sevskiy GmbH. All rights reserved. No warranties.

1164...1300 MHz PCB Antenna (GPS L2/L5, GLONASS L2/L3, Galileo E5a/E5b/E6, BeiDou B2/B3)

Peak realized gain

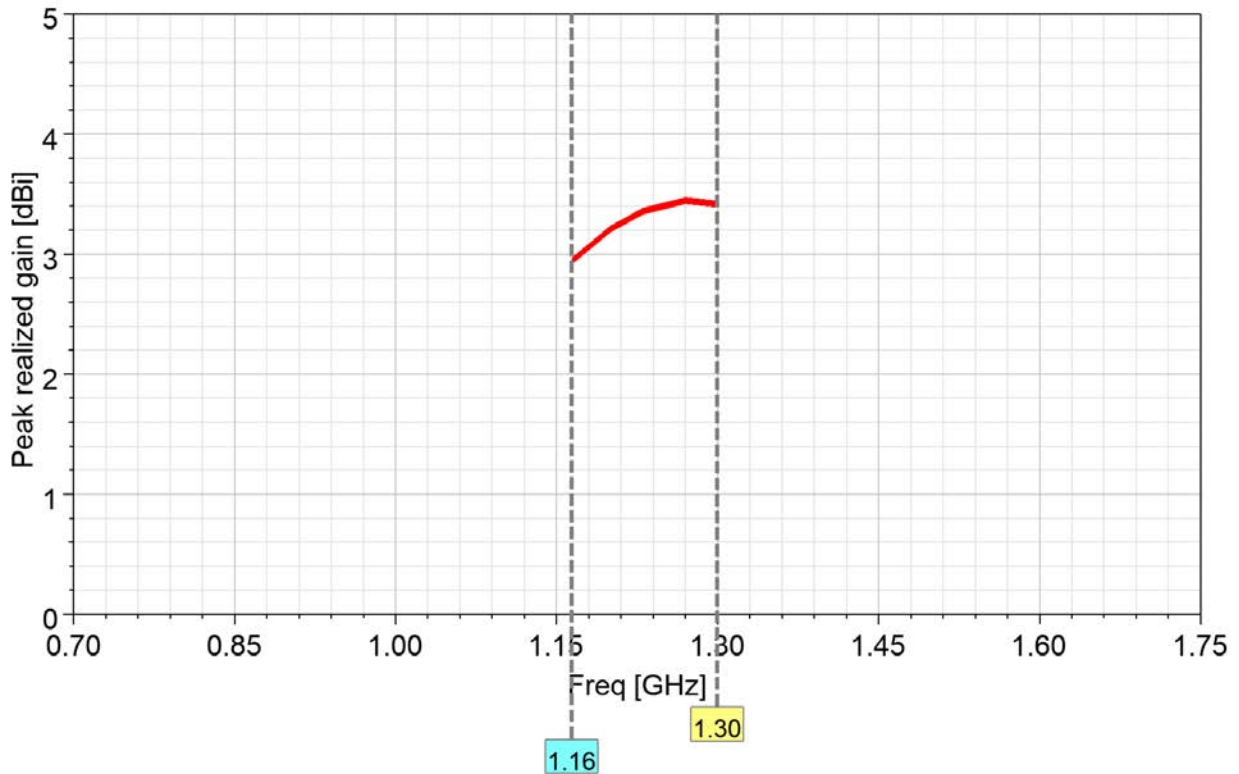


Radiation efficiency

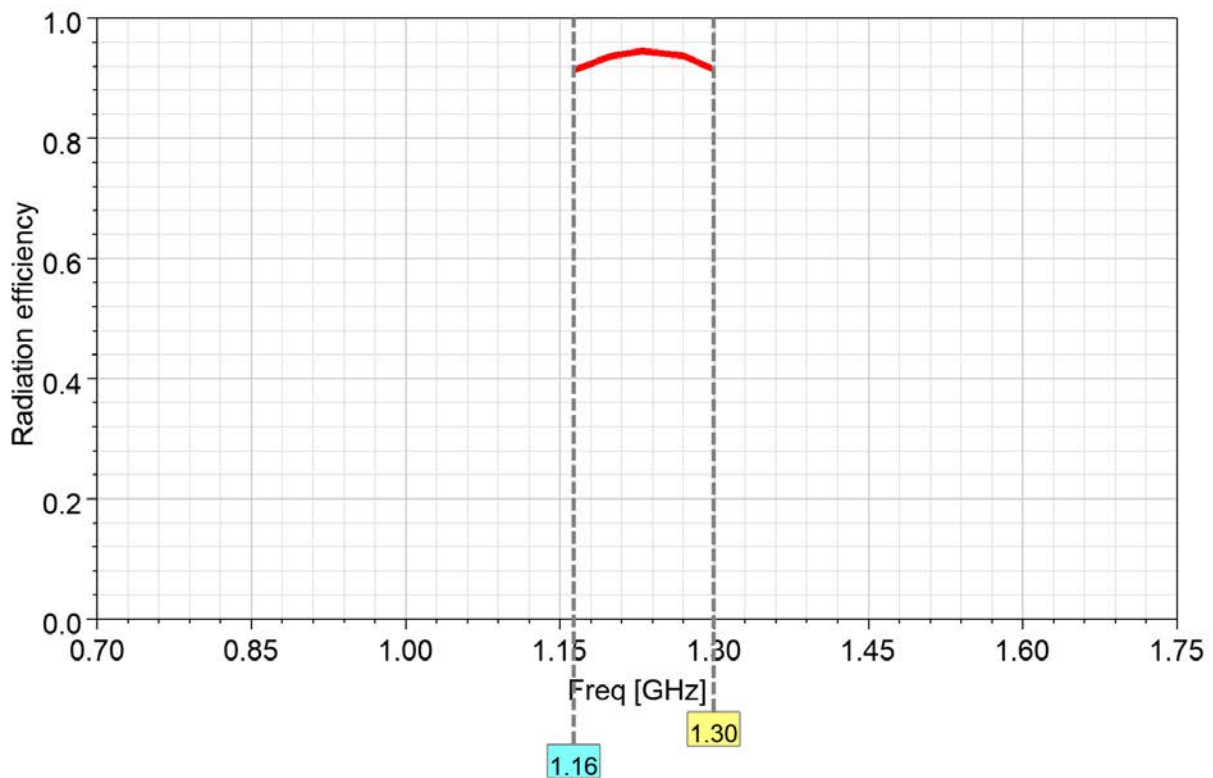

All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2026 Sevskiy GmbH. All rights reserved. No warranties.


1164...1300 MHz PCB Antenna (GPS L2/L5, GLONASS L2/L3, Galileo E5a/E5b/E6, BeiDou B2/B3)

Product dimensions


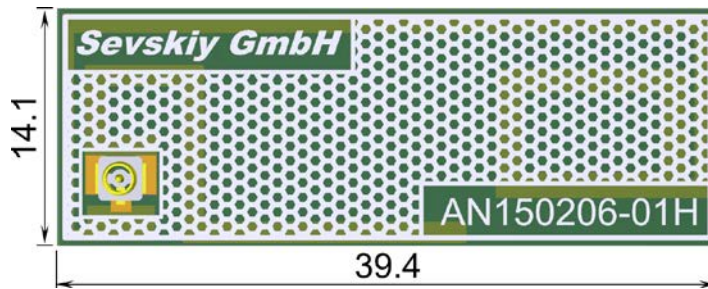


Units: mm

Radiation pattern

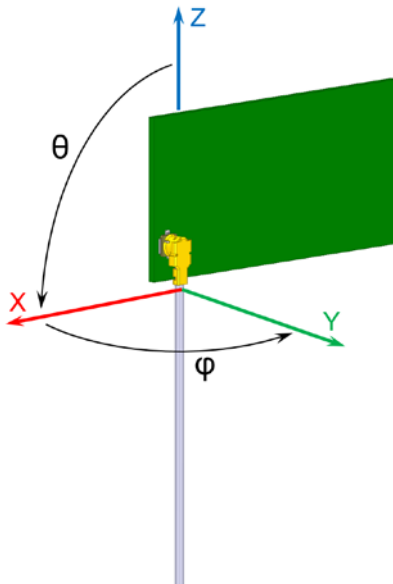

Total realized gain [dBi]
 Phi=0°, plane XZ, green curve
 Phi=90°, plane YZ, red curve
 Theta=90°, plane XY, blue curve

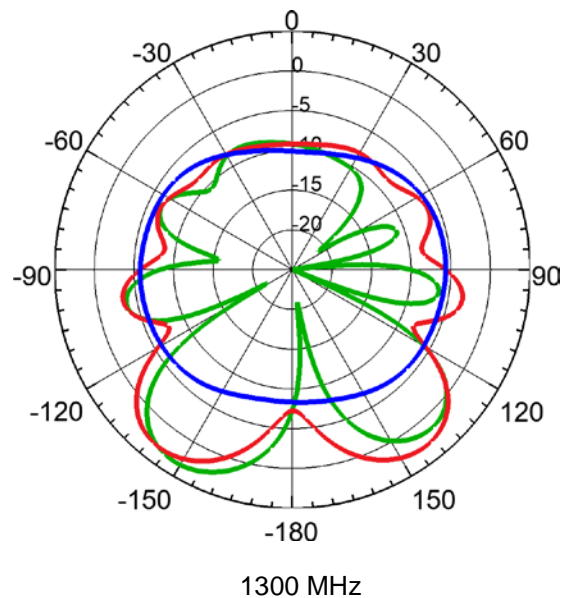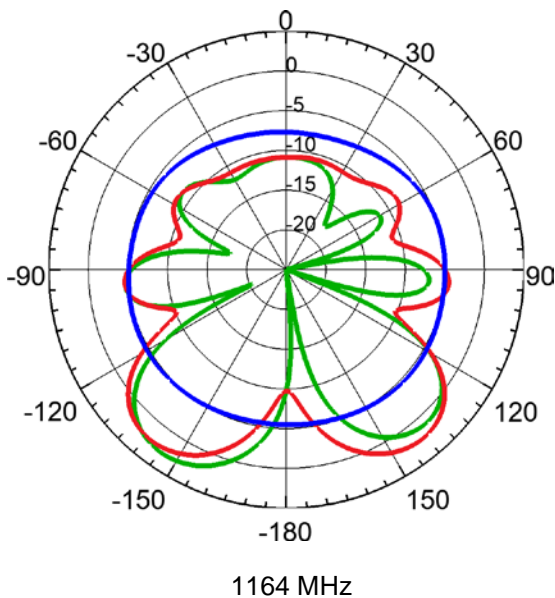

All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2026 Sevskiy GmbH. All rights reserved. No warranties.