

824...924 MHz / 2400...2500 MHz / 4400...6000 MHz PCB Antenna (ISM, IoT, BT, Wi-Fi, 5G, LTE)



General information

The AN250201-03H is a compact wideband embedded PCB antenna designed for internal integration into multi-standard wireless devices requiring reliable operation across sub-GHz, 2.4 GHz, and wideband 5 GHz frequency ranges. The antenna covers the 824...924 MHz, 2400...2500 MHz, and 4400...6000 MHz bands, supporting a broad set of wireless technologies including LTE and sub-GHz cellular bands, 5G NR bands below 6 GHz, Bluetooth, and IEEE 802.11 a/b/g/n/ac/ax (Wi-Fi).

With omnidirectional radiation characteristics and linear polarization, the antenna is well suited for compact devices where stable all-around coverage is required. Typical applications include IoT and LPWAN devices, smart meters, industrial sensors, asset tracking systems, wireless gateways, and portable or embedded communication modules. The antenna is implemented on an FR-4 PCB and features an I-PEX MHF1 / Hirose U.FL (UMCC) compatible connector, enabling flexible integration via a micro-coaxial RF cable and simplified RF layout within space-constrained enclosures.

Electrical data

Antenna type	Embedded / internal PCB antenna		
5G bands	5, 18, 26, 46, 47, 53, 79, 81, 82, 89		
4G bands	5, 6, 18, 19, 20, 26, 27, 46, 47, 53		
Other frequency bands	SRD860, ISM915, ISM2400, Wi-Fi 5 GHz, ISM5800		
Frequency range [MHz]	824...924	2400...2500	4400...6000
Return loss [dB]	-6	-10	-10
Peak gain [dBi]	-0.9...0.7	3.5...4	2.5...4.3
Radiation efficiency [%]	75...90	80...90	70...90
Nominal input impedance [Ohm]	50		
Polarization	linear		
Radiation pattern	omnidirectional		
Maximum input power [W]	5		

Mechanical data

Antenna PCB dimensions [mm]	38 x 17 x 1
Connector type ¹⁾	IPEX MHF1 / Hirose U.FL (UMCC) compatible ¹⁾
Cable type and thickness ²⁾ [mm]	micro coax 1.13 ²⁾
Cable length ³⁾ [mm]	175 ³⁾
PCB material	FR4

Additional information

¹⁾ Other connector types can be offered on request.

²⁾ Following cable thicknesses can be used with MHF1 connector: 0.81 mm, 1.13 mm, 1.32 mm, 1.37 mm.

³⁾ Recommended length. Cable is not included but can be customized and provided separately.

Antenna performance was measured using the recommended cable length in free space.


Further customization, electromagnetic simulations and measurements can be offered on request.

The antenna can be additionally equipped with adhesive tape and mounting holes.


All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2026 Sevskiy GmbH. All rights reserved. No warranties.

824...924 MHz / 2400...2500 MHz / 4400...6000 MHz PCB Antenna (ISM, IoT, BT, Wi-Fi, 5G, LTE)

Measured input impedance matching

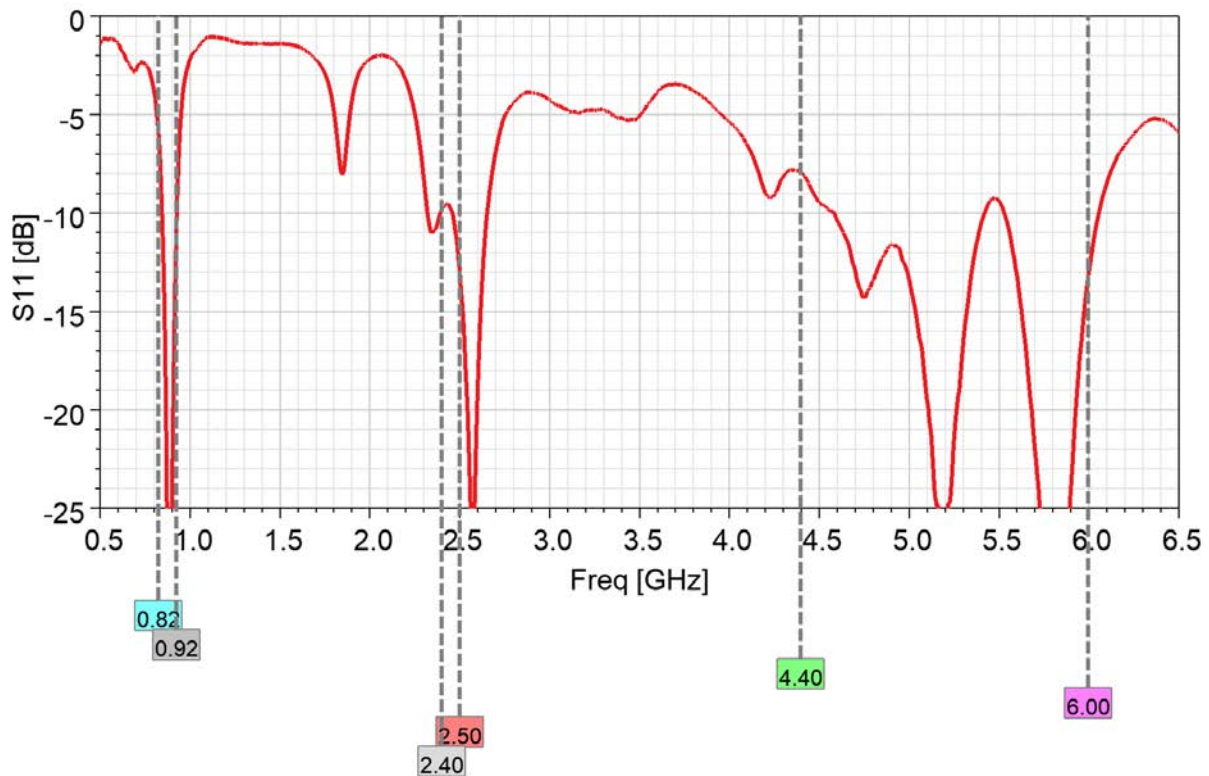


VSWR

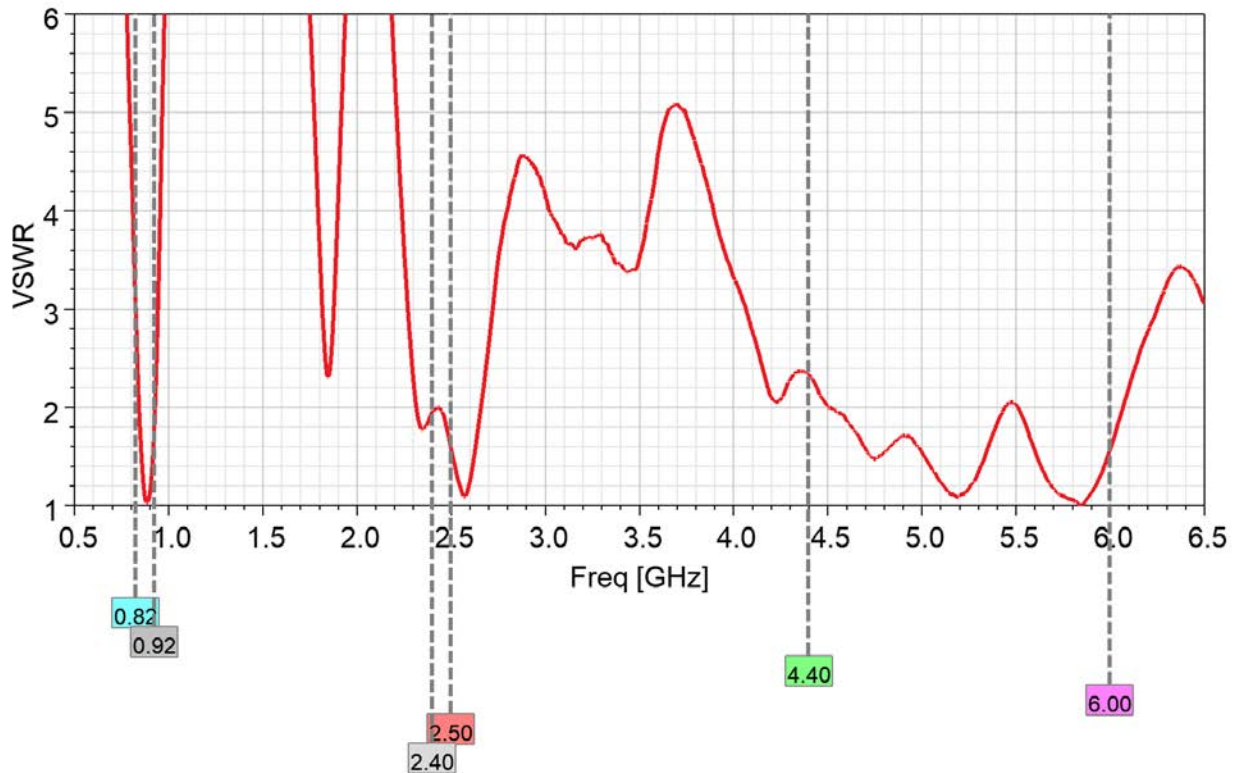


All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2026 Sevskiy GmbH. All rights reserved. No warranties.

824...924 MHz / 2400...2500 MHz / 4400...6000 MHz PCB Antenna (ISM, IoT, BT, Wi-Fi, 5G, LTE)

Peak realized gain

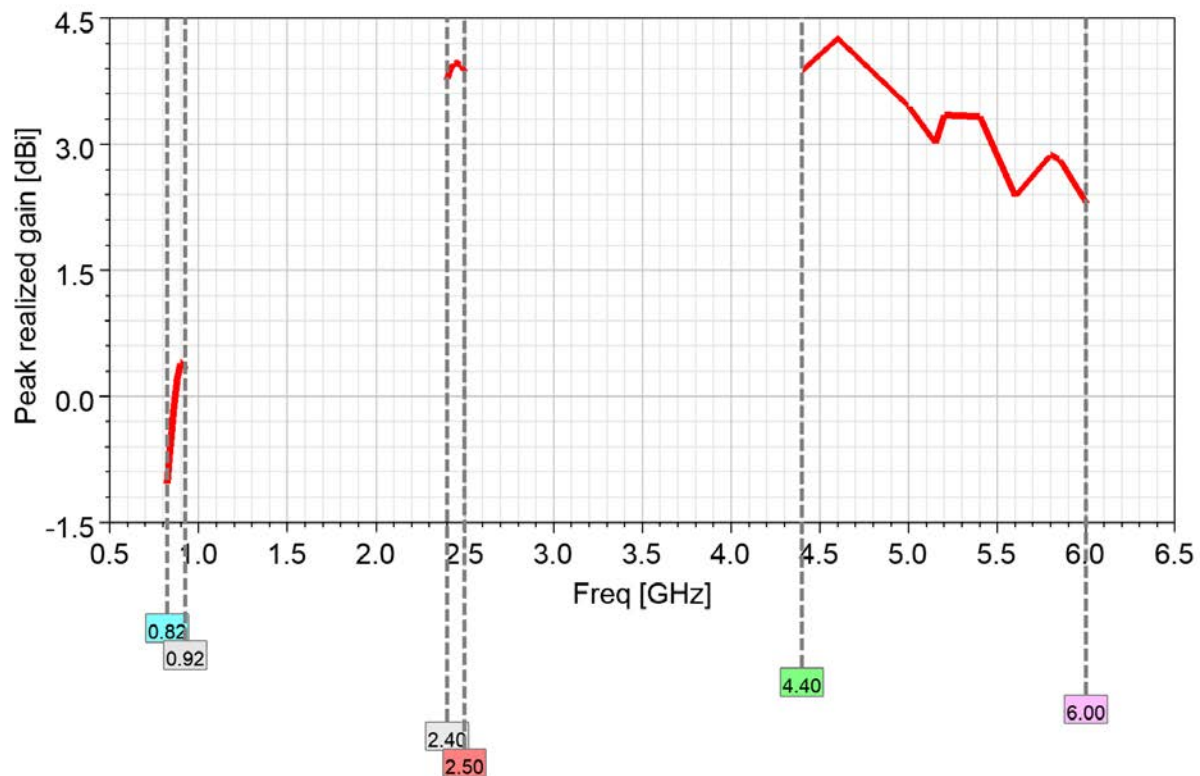


Radiation efficiency

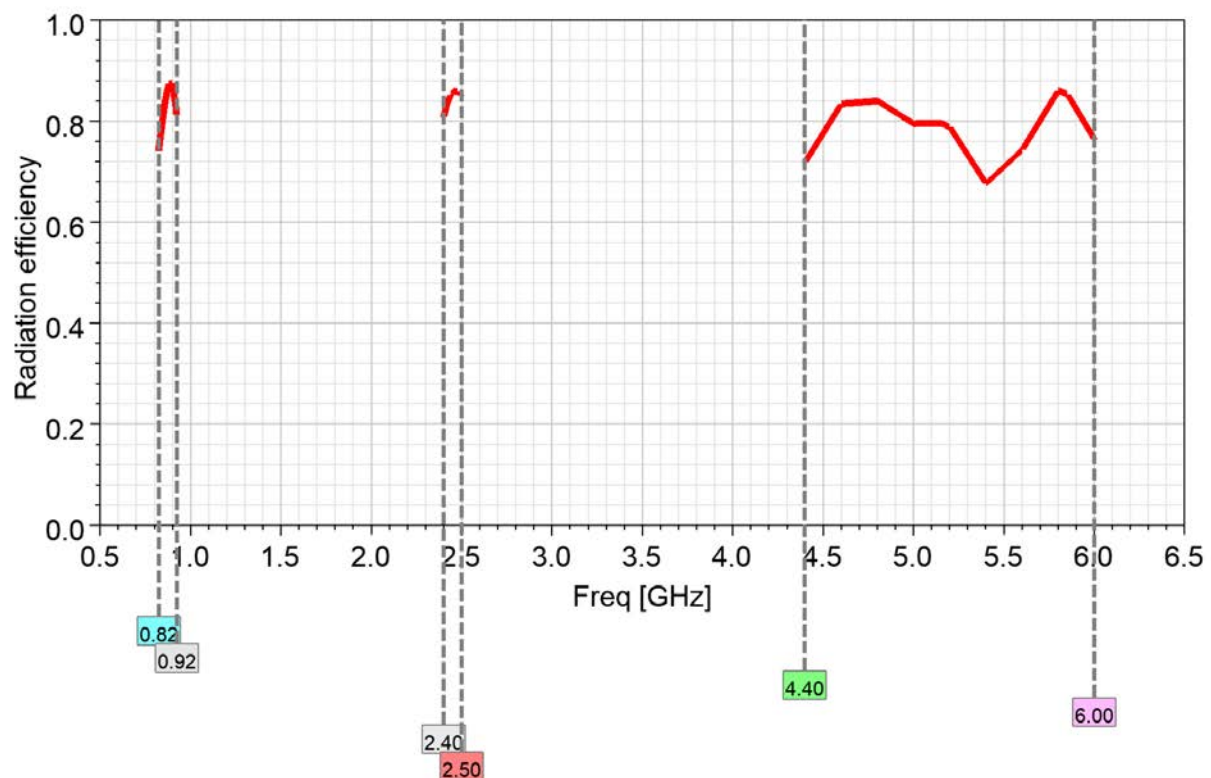

All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2026 Sevskiy GmbH. All rights reserved. No warranties.


824...924 MHz / 2400...2500 MHz / 4400...6000 MHz PCB Antenna (ISM, IoT, BT, Wi-Fi, 5G, LTE)

Product dimensions

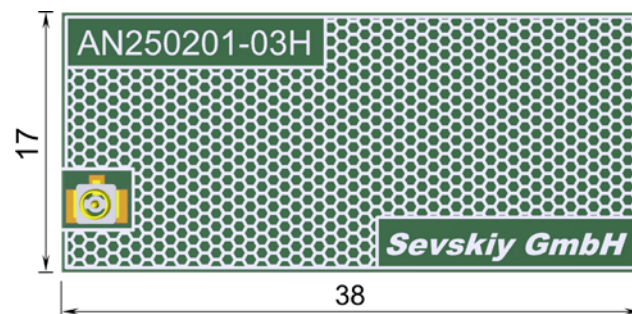


Units: mm


Radiation pattern

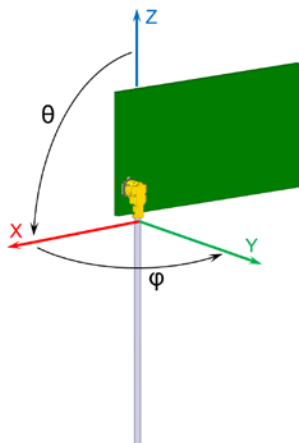


Total realized gain [dBi]
Phi=0°, plane XZ, green curve
Phi=90°, plane YZ, red curve
Theta=90°, plane XY, blue curve

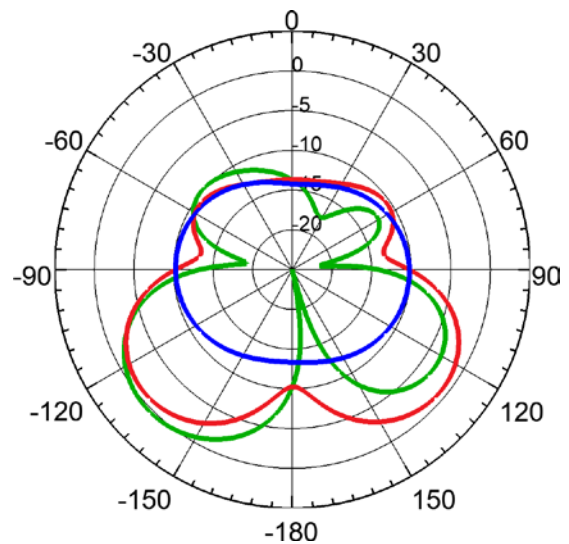

920 MHz

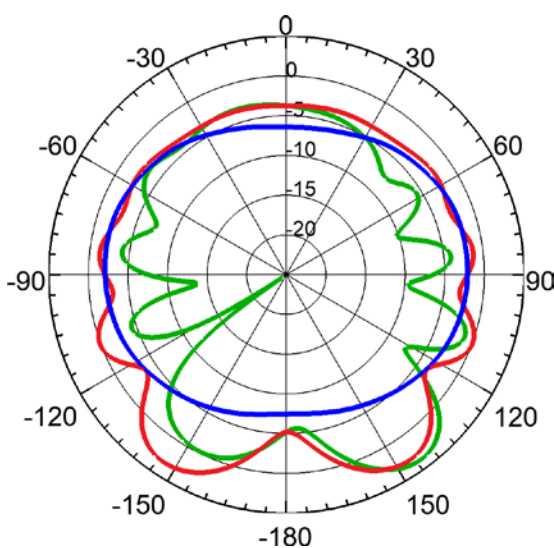

2480 MHz

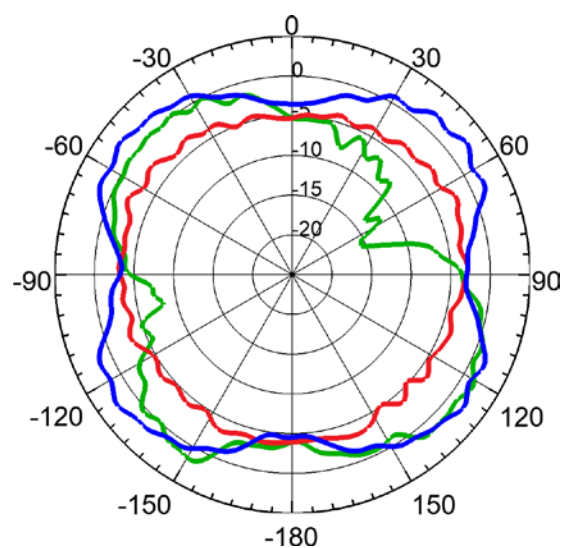

5800 MHz

All information (including technical data and pictures) presented in this document is typical and subject to change without notice. Sevskiy is a registered trade mark of Sevskiy GmbH. Copyright © 2009 - 2026 Sevskiy GmbH. All rights reserved. No warranties.